
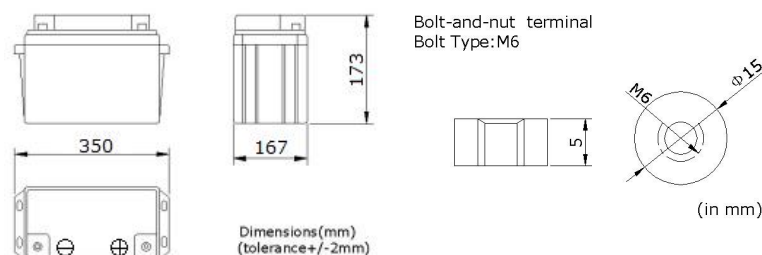


PHYSICAL SPECIFICATION

Nominal Voltage		12V
Nominal Capacity (10HR)		65Ah
Dimension	Length	350±1mm (13.78 inches)
	Width	167±1mm (6.57 inches)
	Container Height	173±1mm (6.81 inches)
	Total Height	173±1mm (6.81 inches)
Weight		Approx. 20Kg ±3% (44.08lbs)
Standard Terminal		Bolt-and-nut terminal Bolt Type: M6



Shimastu NP series AGM VRLA Batteries have been developed as general purpose batteries, they're valve-regulated lead acid batteries with high quality Absorbed Glass Mat(AGM) separators & high purity raw materials, featured by perfectly good performance and reliable standby service life.


Features:

- 1.Non-spillable
- 2.Sealed and Maintenance-free Operation
- 3.High Quality and High Reliability
- 4.Less gassing, low Self-discharge
- 5.Low internal resistance
- 6.Long design life up to 10 years in float service at 25°C (77 °F)

ELECTRICAL SPECIFICATION

Capacity	10 hour rate (6.5A)	65Ah
	5 hour rate (11.1A)	55.5Ah
	3 hour rate (16.3A)	48.9Ah
	1 hour rate (35.8A)	35.8Ah
Capacity affected by temperature	40°C (104 °F)	102%
	25°C (77 °F)	100%
	0°C (32 °F)	85%
Max Discharge Current		650A(5 Sec)
Short Circuit Current		1500A
Internal Resistance		Full charged battery (25°C, 77 °F) 6mΩ
Constant Voltage Charge	Cycle	Initial Charging Current less than 16.2A Voltage 14.1~14.4V at 25°C (77 °F) Temperature Coefficient -30mV/°C
	Standby	No limit on Initial Charging Current Voltage 13.5~13.8V at 25°C (77 °F) Temperature Coefficient -20mV/°C

Discharge curves @ 25°C (77 °F)

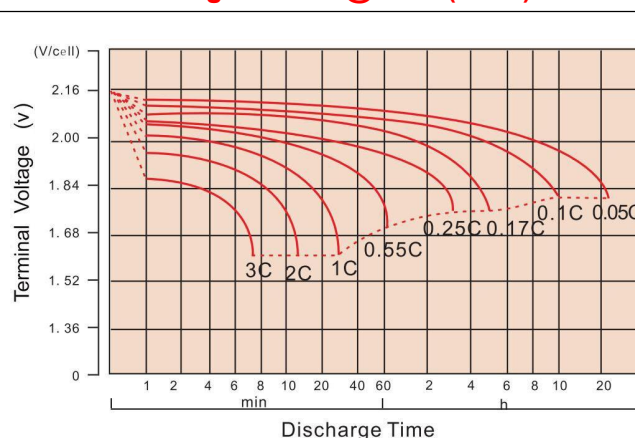


CONSTANT CURRENT DISCHARGE RATING A@25°C

F.V/TIME	5MIN	10MIN	15MIN	30MIN	1HR	3HR	5HR	10HR	20HR
1.60V	227.2	156.3	117.6	70.3	40.3	18.4	12.3	6.89	3.58
1.65V	211.2	147.6	112.5	67.6	38.8	17.8	12.0	6.80	3.54
1.70V	190.6	135.9	105.3	64.7	37.3	17.3	11.7	6.66	3.49
1.75V	170.8	124.4	98.0	61.6	35.8	16.8	11.4	6.58	3.45
1.80V	149.9	112.6	90.5	58.9	34.5	16.3	11.1	6.50	3.41


CONSTANT POWER DISCHARGE RATING WATT PER CELL@25°C

F.V/TIME	5MIN	10MIN	15MIN	30MIN	1HR	3HR	5HR	10HR	20HR
1.60V	376.6	265.6	205.6	127.7	75.8	35.1	23.8	13.6	6.99
1.65V	354.2	255.8	199.6	124.0	73.3	34.2	23.1	13.3	6.93
1.70V	326.9	239.9	189.7	119.9	70.9	33.4	22.6	13.1	6.87
1.75V	299.4	223.5	179.1	115.3	68.4	32.5	22.1	13.0	6.79
1.80V	268.4	205.8	167.7	111.4	66.3	31.6	21.6	12.8	6.76


Cycle service life

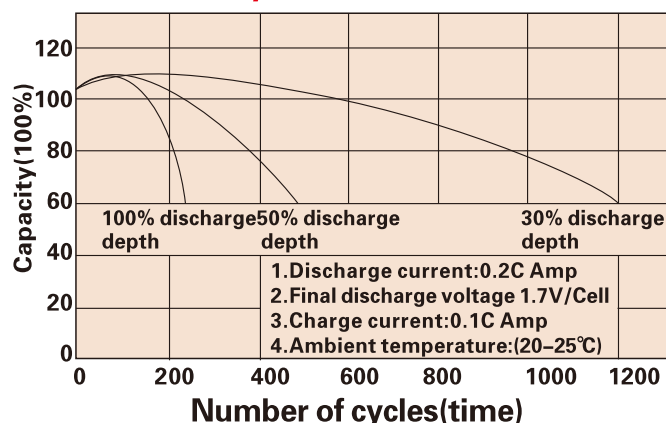


Trickle(or float) service life

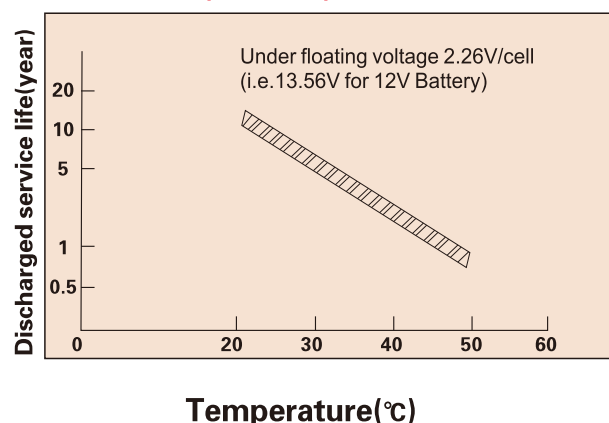


Storage time(months)

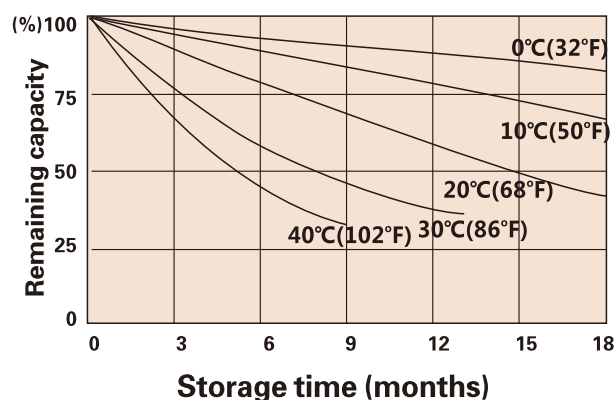

Temperature and discharge capacity

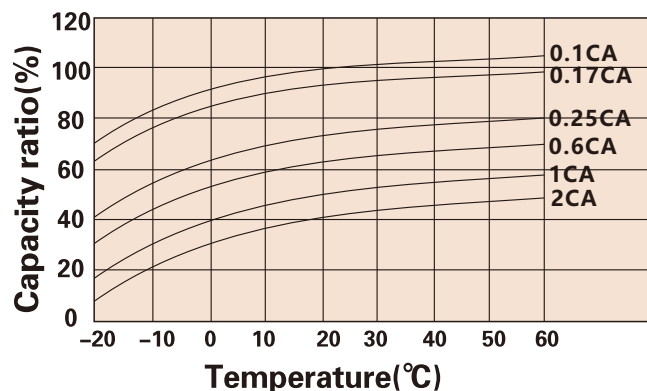

Charging characteristic

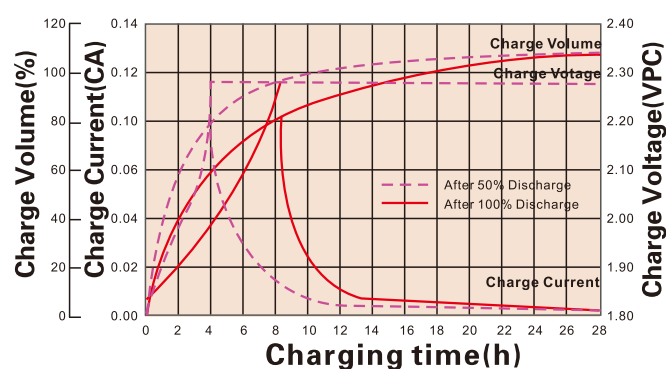

Storage Temperature	Supplementary Charge Interval	Charge Method
≤20°C	Every 12 months	Less or 24 hours with a constant voltage of 2.3V/cell
20-30°C	Every 8 months	12-18 hours with a constant voltage of 2.45V/cell
≥30°C	Storage to be avoided	8-12 hours with a constant current of 0.05CA

APPLICATIONS

Standby Usage:

- UPS
- Emergency Lights
- Alarm Systems
- Telecommunication Systems

Cyclic Usage:

- Medical Equipments
- Electric Instruments
- Toys
- Camcorder and Solar Systems

Motive Usage:

- Golf Cars
- Wheelchairs
- Lawnmowers
- Motorcycle

(Note) All above information shall be changed without prior notice, Shimastu reserves the right to explain and update the latest information.

Shimastu Electronic Technology Co., Limited

URL: www.shimastu.com

Tel: +86-760-23133619 Fax: +86-760-23133629 Email: export@shimastu.com